

# Professional desktop thermal printers

TD Series

[www.brother.co.uk/td](http://www.brother.co.uk/td)



# Versatile, high-resolution desktop printers

Brother's range of TD professional thermal printers allows you to print high quality labels on demand. Printing labels up to 4 inches in width, using direct thermal and thermal transfer print technology, they fit the requirements of a large range of market applications.



TD professional  
desktop label printers



## Seamless integration

Brother's high specification desktop label printers bring you improved operational efficiency with easy to use, high speed and continuous label printing. Combined with seamless integration and modular design, print from virtually anywhere in the workplace. Supporting a variety of printer command languages, including ZPL II emulation, the TD printers allow you to integrate into existing legacy systems.



## Up to 2 inch labels - Direct thermal



TD-2020A

TD-2120N

TD-2130N

TD-2125N

TD-2135N

TD-2125NWB

TD-2135NWB

## Up to 4 inch labels - Direct thermal



TD-4210D

TD-4410D

TD-4420DN

TD-4520DN

TD-4550DNWB

## Up to 4 inch labels - Direct thermal (linerless)



TD-4420DNFC



TD-4550DNWBFC

## Up to 4 inch labels - Thermal transfer/Direct thermal



TD-4420TN



TD-4520TN



TD-4650TNWB



TD-4750TNWB



TD-4650TNWBR



TD-4750TNWBR

# Professional label printing



Labels are often required to display a considerable amount of important information, so you need a printer that can put it all together efficiently, with consistent, high-quality results.

The TD series desktop label printers offers direct thermal and thermal transfer high-speed printing, at up to 300dpi resolution. Options include a peeler or automatic cutter, for producing continuous media to your required length. The software supports barcode printing, embellish font programming for highlighting specific words, and also allows you to import graphics and date formats for a truly personalised solution.

## Printing technology

### Direct thermal

Low-cost, high-volume labels can be created using a heat-sensitive coating and thermal print head, meaning traditional printing ribbons and inks are not required. Ideal for shorter term and less permanent labelling uses.

### Thermal transfer

Crisp, durable printing is achieved through a process in which the ink is absorbed into the label, making it ideal for applications that require robust, harder-wearing and/or RFID labels.

# Healthcare, medical and laboratory



With the strict regulations on the tracking of patient specimens and other items within the healthcare industry, clear, high quality labelling is essential to maintain safety and traceability.

A selection of the thermal transfer TD models offer RFID capability, allowing healthcare organisations to implement paper-free patient identification - improving efficiency and reducing human error.

## Applications include:

- Appointment cards
- Admission labels
- Specimen, phlebotomy and pathology labels
- Blood bag labels
- Laboratory labels
- Microbiology labels
- Dosage/drug bag labels
- Wristbands.



# Warehousing and logistics



Efficient warehousing operation and worker productivity are critical to the success of many companies. With the most common sizes of shipping labels available and the ability to create custom sized labels there are many uses for these models in the warehouse.

## Applications include:

- Shipping labels
- Carton labels
- Location labels
- Pallet identification labels
- Quality control labels
- Compliance labels.



# Retail



Easy to read labels are essential for consumers to help make informed decisions prior to a potential purchase. The high print resolution and high quality labels used in this range ensure that every output printed looks professional; offering sharp text, logos and barcodes with a high contrast to ensure faultless scanning at the checkout.

Futhermore, printing labels with RFID tags enables retailers to streamline inventory management and asset tracking while improving security.

**Applications include:**

- Pricing labels
- Barcode labels
- Pre-packaged food ingredient and allergen labels
- Nutrition information labels
- Shelf-edge labels
- Sale/mark-down/discount pricing labels.



# TD-2000 Range

TD-2020A

TD-2120N

TD-2130N

2 inch

## Printing

Print technology	Direct thermal	
Print speed	MAX 6 ips (152.4 mm/sec) (*Under Brother standard environment) (Battery option: Max 3 ips (76.2mm/sec))	
Resolution	203dpi	300dpi
Max. print width	56mm	
Max. print length	1,000mm	
Min. print length	6mm	
Media sensor type	Gap (transmissive), Bar (reflective)	
Media sensor location	Reflective (adjustable), Gap (fixed)	
Tear off release mode	Standard: Continuous, Tear off Optional: Not supported	Standard: Continuous, tear off Optional: Peeled

## Media

Media types	Receipt, label and wristband
Media thickness	0.058mm - 0.279mm
Media width	19mm - 63mm
Media length	12.7 mm - 1,000mm
Diameter (max)	127mm
Core diameter (max)	25.4mm

## Connectivity

USB	●	●	●
Serial	Yes RS232C * Original serial cable (option required)		
Wired LAN	—	10/100BASE-TX	
USB host port	—	Supported only PA-WI-001 (optional) or barcode readers	
Bluetooth (option)	—	●	●
Bluetooth profile	—	SPP (Serial Port Profile) / BIP (Basic Imaging Profile) / OPP (Object Push Profile) supported	
Wireless LAN (option)	—	IEEE802.11b/g/n (Infrastructure Mode IEEE802.11b (Adhoc mode))	
Wireless LAN security	—	Open System (None/WEP) <Personal mode> Open System (None/WEP) Public Key Authentication (WEP) WPA-PSK/WPA2-PSK (TKIP/AES)  <Enterprise mode> LEAP (CKIP) EAP-FAST (TKIP/AES) PEAP (TKIP/AES) EAP-TTLS (TKIP/AES) EAP-TLS (TKIP/AES)	

## General

Control panel	3 button 2 LED		
Touch panel keyboard display with real time clock (option)	—	●	●
Tear bar	●	●	●
Peeler	—	Optional	
Battery (option)	—	●	●
Battery charging time	—	180 min. (23°C New battery)	
Battery yield	—	57mm x 200m (1 roll : 5 inch OD roll)) * Connected by USB with new battery with full charging. Printed by Brother special data (9% coverage 57mm x 127mm) at 23 degree Celsius (*Under Brother standard environment)	
Adaptor	Yes RS232C * Original serial cable (option required)		

# TD-2000 Range

TD-2020A

TD-2120N

TD-2130N

2 inch

## Memory

RAM	32MB
Flash	16MB

## Environmental

Media types	Operate: 5°C to 40°C	Operate: 5°C to 40°C Charge: 5°C to 40°C
Media thickness	20 to 80% (No condensation, Maximum wet bulb temperature: 27°C)	
Media width	-20°C to 60°C	
Media length	20 to 80% (No condensation, Maximum wet bulb temperature: 45°C)	

## Weights and dimensions

Dimensions (mm)	110mm (w) x 172mm (h) x 215mm (d)	
Weights	Printer: 1.32kg	Printer: 1.34kg, Printer with battery: 1.88kg

## Included items

Supplied in box	<p>AC power cord and AC adaptor, USB cable (mini-USB), Quick reference guide, Product Safety guide (including warranty card), CD (Printer driver, P-touch editor 5.0, P-touch transfer manager 2.1, P-touch update software, Printer setting tool, User's guide, Software user's guide)</p>	<p>AC power cord and AC adaptor, USB cable (mini-USB), Quick reference guide, Product Safety guide (including warranty card), CD (Printer driver, P-touch editor 5.0, P-touch transfer manager 2.1, P-touch update software, BRAdmin light, Printer setting tool, User's guide, Software user's guide, Network user's guide)</p>
-----------------	---	--



# TD-2000 Range

TD-2125N

TD-2135N

TD-2125NWB

TD-2135NWB

2 inch

## Printing

Print technology	Direct thermal			
Print speed	152.4mm/sec (6ips)			
Resolution	203dpi	300dpi	203dpi	300dpi
Max. print width	56mm			
Max. print length	1,000mm			
Min. print length	6mm			
Media sensor type	Gap (transmissive), Bar (reflective)			
Media sensor location	Reflective (adjustable), Gap (fixed)			
Tear off release mode	Standard: Continuous, tear off Optional: Peeled			

## Media

Media types	Receipt (Non-coated & Coated) Die cut label Tag Wristband			
Media thickness	0.058mm - 0.279mm			
Media width	19mm - 63mm			
Media length	12.7mm - 1,000mm			
Diameter (max)	127mm			
Core diameter (max)	25.4mm			

## Connectivity

USB	●	●	●	●
Serial	Yes* Original serial cable (Option: PA-SCA-001)			
Wired LAN	10/100BASE-TX			
USB host port	Yes			
Bluetooth	—	—	Version 5.2 +BLE	
Bluetooth profile	—	SPP (Serial Port Profile)/ OPP (Object Push Profile) / HCRP (Hard Copy Replacement Profile) / MFi(iAP2) supported		
Wireless LAN	—	Infrastructure IEEE802.11b/g/n 2.4GHz Wireless Direct IEEE802.11g/n 2.4GHz *IEEE802.11a/n 5GHz Ad-hoc is not supported		
Wireless LAN security	—	Infrastructure Mode: <Personal mode> Open System(None/WEP) Public Key Authentication(WEP) WPA-PSK/WPA2-PSK/WPA3-SAE(TKIP+AES) WPA3-SAE(AES)  <Enterprise mode> EAP-FAST (TKIP/AES) PEAP (TKIP/AES) EAP-TTLS (TKIP/AES) EAP-TLS (TKIP/AES)  *LEAP is not supported.		

## General

Control panel	3 button 2 LED			
Touch panel keyboard display with real time clock (option)	●	●	●	●
Tear bar	●	●	●	●
Peeler	Optional			
Battery (option)	—			
Serial adaptor	Yes RS232C * Original serial cable (option required)			

# TD-2000 Range

TD-2125N

TD-2135N

TD-2125NWB

TD-2135NWB

2 inch

## Memory

RAM	256MB
Flash	64MB

## Environmental

Operating temperature	Operate: 5°C to 40°C
Operating humidity	20 to 80% (No condensation, Maximum wet bulb temperature: 27°C)
Storage temperature	-20°C to 60°C
Storage humidity	20 to 80% (No condensation, Maximum wet bulb temperature: 45°C)

## Weights and dimensions

Dimensions (mm)	110mm (w) x 172mm (h) x 215mm (d)	
Weights	Printer : 1.33kg	Printer : 1.34kg

## Included items

Supplied in box	AC power cord and AC adaptor, USB cable (mini-USB), Quick reference guide, Product safety guide (including warranty card)
-----------------	---



# TD-2000 Accessories and supplies

Brother has designed and engineered a wide range of accessories to help customise the solution to meet your specific labelling requirements. Brother accessories help users equip their device to cope with the specific requirements of use.

## Power and additional options

### PA-WI-001

#### Wi-Fi interface

TD-2120N  
TD-2130N



### PA-TDU-001

#### Touch-display unit

TD-2120N  
TD-2130N  
TD-2125N  
TD-2135N  
TD-2125NWB  
TD-2135NWB



### PA-BB-001

#### Battery charging unit\*

TD-2120N  
TD-2130N



\* Requires PA-BT-4000LI

### PA-BT-4000LI

#### Li-ion rechargeable battery\*

TD-2120N  
TD-2130N



\* Requires PA-BB-001

### PA-LP-001


#### Label peeler

TD-2120N  
TD-2130N  
TD-2125N  
TD-2135N  
TD-2125NWB  
TD-2135NWB



## Desktop printing supplies

Supply type	Part code	Description	Size	Quantity	Rolls/box
Receipt	BDL-7J000058-102	Continuous receipt roll	58mm x 101.6m	n/a	8
Labels	BDE-1J026051-102	Die-cut labels roll	51mm x 26mm	1,900 labels	16

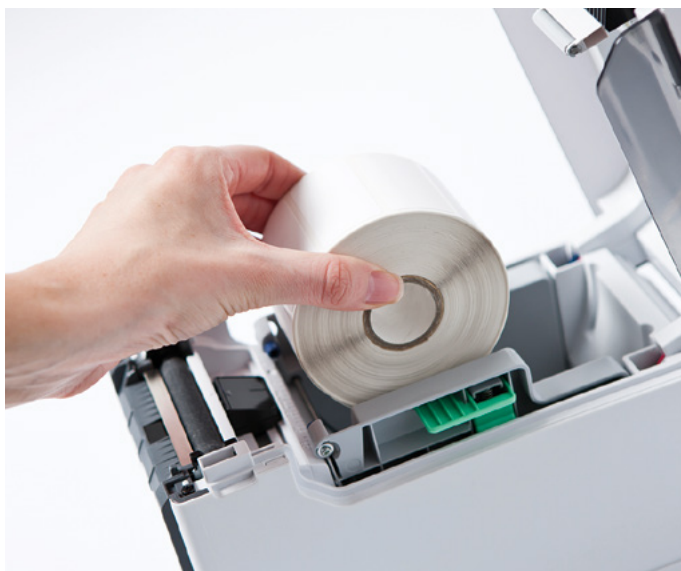



Chicken Tikka



Allergens:  
Wheat, milk, barley, soya



2 012341 234501

EAT BY:

14:42 € 2.25 11.02.19

Egg & Cress



Allergens:  
Wheat, egg, mustard



EAT BY:

14:42 € 1.55 11.02.19

# TD-4D Range

TD-4210D

TD-4410D

TD-4420DN

TD-4520DN

TD-4550DNWB

TD-4420DNFC

TD-4550DNWBFC

4 inch

## Printing

Print technology	Direct thermal				
Print speed	127mm/sec	203mm/sec		152mm/sec	203mm/sec 152mm/sec
Resolution	203dpi		300dpi		203dpi 300dpi
Max. print width	104.1mm		108.4mm		104.1mm 108.4mm
Min. print length	Continuous: 6.4mm, Peeler: 12.7mm, Cutter: 20mm, Tear: 18mm				20mm
Max. print length	3,000mm				
Media sensor type	Gap (Transmissive), Bar (Reflective)			Gap (Transmissive), Black mark (Reflective)	
Media sensor location	Gap (Fixed), Reflective (Adjustable)				
Tear off release mode	Standard: Continuous, Tear off Optional: Peeler, Cutter			Standard: Cut	

## Media

Media types	Wristbands, Continuous, Die cut, Fan fold, Perforated, Tag	Linerless label rolls
Media thickness	0.058mm - 0.279mm	0.086mm - 0.095mm
Media width	19mm - 118.11mm	39mm - 106mm
Media length	6.4mm - 3,000mm	20mm - 3,000mm
Diameter (max)	127mm	102mm
Core diameter (min)	12.7mm	25.4mm

## Connectivity

USB	USB version 2.0 (full speed) Type B				
USB host	—	—	●	—	●
Serial	Serial RS232C (DB9 male)				
Wired LAN	—	10/100BASE-TX			
Bluetooth	—	Version 4.2		—	Version 4.2
Bluetooth profile	—	SPP, OPP, HCRP Bluetooth Classic, GATT (Bluetooth Low Energy)		—	SPP, OPP, HCRP Bluetooth Classic, GATT (Bluetooth Low Energy)
Wireless LAN	—	802.11a/b/g/n		—	802.11a/b/g/n
Wireless LAN security	—	See model TD-4650TNWB specifications and also includes Wireless direct mode WPA2-PSK (AES)		—	See model TD-4650TNWB specifications and also includes Wireless direct mode WPA2-PSK (AES)
MFI support	—	●		—	●
AirPrint	—	●		—	●

\* Not suitable for RFID media

# TD-4D Range

TD-4210D

TD-4410D

TD-4420DN

TD-4520DN

TD-4550DNWB

TD-4420DNFC

TD-4550DNWBFC

4 inch

## General

Control panel	3 button 3 LED	7 button 3 LED	3 button 3 LED	7 button 3 LED
LCD type	—	Mono	—	Mono

## Power

Adaptor	AC adaptor (100 - 240V 50/60Hz)
---------	---------------------------------

## Software

Operating system support	Windows 7/8/8.1/10/11, Linux	Windows 7/8/8.1/10/11, Windows Server 2008/2008R2/2012/2012R2/2016/2019/2022, Linux	Microsoft Windows 10/11, Microsoft Windows Server 2016/2019/2022, Linux
--------------------------	---------------------------------	---	---

Supported printer commands	P-touch Template, ESC/P, Raster, ZPL2, EPL2, DPL, CPCL emulation
----------------------------	--

Barcode symbologies	Linear: CODE 39, ITF(I-2/5), EAN-8(JAN8), EAN-13(JAN13), UPC-A, UPC-E, CODABAR (NW-7), CODE 128, GS1-128 (UCC/EAN 128), GS1 Databar (Standard (Omnidirectional)/ Truncated/Stacked/Stacked Omnidirectional/ Limited/Expanded), CODE93, POSTNET, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode 2-dimensional: QR Code (model 1, model 2, micro QR), Maxicode, PDF417 (Standard, Truncate, MicroPDF417) Data Matrix (ECC200 Square, ECC200 Rectangular) Aztec
---------------------	--

Internal fonts	<ESC/P> Bitmap font: LetterGothicBold (16,24,32,48dot), Helsinki (16,24,32,48dot), Brussels (24,32,48dot), Brougham (24,32,48dot), San Diego (24,32,48dot), Gothic (16,24,32dot) Outline font: LetterGothicRegular, Helsinki, Brussels, Gothic (1 - 400dots) <P-touch Template> Outline font: LetterGothicRegular, Helsinki, Brussels, Gothic (1 - 400dots) Downloadable font support* via Font Manager software
----------------	---

## Memory

RAM	256MB
Flash	64MB

## Environmental

Operating temperature	Operate: 5°C to 40°C
Operating humidity	20 - 85% (No condensation, Max wet bulb temperature: 27°C)
Storage temperature	-20°C to 60°C
Storage humidity	10 - 90% (No condensation)

## Weights and dimensions

Dimensions (mm)	180(w) x 155(h) x 224(d)	180(w) x 155(h) x 281(d)
Weights	2.08kg	2.49kg

## Included items

Supplied in box	AC adaptor and cord, USB cable, documentation	AC adaptor and cord, USB cable, documentation, label support
-----------------	---	---

# TD-4D Accessories and consumable supplies

Brother has designed and engineered a wide range of accessories to help customise your labelling solution. Brother accessories help users equip their device to cope with the specific requirements of use.

## TD-4D Additional options

### PA-LP-002 Label peeler

TD-4210D  
TD-4410D  
TD-4420DN  
TD-4520DN  
TD-4550DNWB



### PA-CU-001 Cutter

TD-4210D  
TD-4410D  
TD-4420DN  
TD-4520DN  
TD-4550DNWB



### PA-LCU-002 Linerless cutter

TD-4420DNFC  
TD-4550DNWBFC



### PA-HU2-001 Thermal print head (203dpi)

TD-4210D  
TD-4410D  
TD-4420DN  
TD-4420DNFC



### PA-HU3-001 Thermal print head (300dpi)

TD-4520DN  
TD-4550DNWB  
TD-4550DNWBFC



### PA-PR2-001 Platen roller (203dpi)

TD-4210D  
TD-4410D  
TD-4420DN



### PA-PR3-001 Platen roller (300dpi)

TD-4520DN  
TD-4550DNWB



### PA-LPR2-002 Linerless platen roller (203dpi)

TD-4420DNFC



### PA-LPR3-002 Linerless platen roller (300dpi)

TD-4550DNWBFC



### TD4HOLDERU1 Tablet holder

TD-4420DN  
TD-4520DN  
TD-4550DNWB



## Desktop printing supplies

Supply type	Part code	Description	Size	Quantity	Rolls/box
<b>Receipt</b> Not compatible with TD-4420DNFC and TD-4550DNWBFC (linerless models)	BDL-7J000102-058	Continuous receipt roll	101.6mm x 32.2m	n/a	20
	BDL-7J000076-066	Continuous receipt roll	76mm x 42m	n/a	8
	BDL-7J000058-102	Continuous receipt roll	58mm x 101.6m	n/a	8
	BDL-7J000058-040	Continuous receipt roll	58mm x 13.8m	n/a	24
<b>Labels</b> Not compatible with TD-4420DNFC and TD-4550DNWBFC (linerless models)	BDE-1J000102-102	Continuous label roll	102mm x 58m	n/a	8
	BDE-1J050102-102	Die-cut label roll	102mm x 50mm	1,050 labels	8
	BDE-1J152102-058	Die-cut label roll	102mm x 152mm	85 labels	20
	BDE-1J152102-102	Die-cut label roll	102mm x 152mm	350 labels	8
	BDE-1J026076-102	Die-cut label roll	76mm x 44mm	1,900 labels	8
	BDE-1J044076-066	Die-cut label roll	76mm x 44mm	400 labels	8
	BDE-1J026051-102	Die-cut label roll	51mm x 26mm	1,900 labels	16
	BDE-1J026051-060	Die-cut label roll	51mm x 26mm	500 labels	12

# TD-4T Range

TD-4420TN

TD-4520TN

TD-4650TNWB

TD-4750TNWB

TD-4650TNWBR

TD-4750TNWBR

4 inch

## Printing

Print technology	Thermal Transfer/Direct Thermal					
Print speed	152mm/sec	127mm/sec	203.2mm/sec	152.4mm/sec	203.2mm/sec	152.4mm/sec
Resolution	203dpi	300dpi	203dpi	300dpi	203dpi	300dpi
Max. print width	108mm	105.7mm	108mm	105.7mm	108mm	105.7mm
Min. print length	Peeler: 25.4mm, Cutter: 25.4mm Tear: 50mm		Continuous: 5mm Tear mode: Media width less than 2 inch: 25.4 mm Media width greater than 2 inch: 50 mm Peeler mode: 25.4mm Cutter mode: 25.4mm			
Max. print length	25,400mm	11,430mm	25,400mm	11,430mm	25,400mm	11,430mm
Media sensor type	Gap (Transmissive), Bar (Reflective)					
Media sensor location	Gap (Fixed), Reflective (Adjustable)					
Tear off release mode	Standard: Continuous, tear off Optional: Peeler, cutter		Standard: Continuous, tear off Optional: Peeler, cutter		Standard: Continuous, tear off Optional: Peeler, cutter*	

## Media

Media types	Wristbands, Continuous, Die cut, Fan fold, Perforated, Tag	Media type Continuous, black mark, label with gap, notch media, punched hole media	Media type Continuous, black mark, label with gap, notch media, punched hole media, Gen2 RFID tag
Media thickness	0.06 - 0.19mm		
Media width	20 - 112mm		
Media length	5mm - Max. print length		
Diameter (max)	127mm		
Core diameter (min)	25.4mm and 38.1mm		

## Ribbon

Types	Wax, Wax/Resin, Resin
Wound type	Outside wound
Ribbon width	40 - 110mm
Suggested paper core width	0.5 inch paper core: fixed width 110mm, width 2 notches in each side 1 inch paper core: fixed width 110mm with 2 notches in each side 1 inch paper core: paper core width is the same as ribbon width and use with ribbon spindles
Inner paper core and ribbon length	0.5 inch paper core: Max. OD 40mm, 110m length 1 inch paper core: Max. OD 67mm, 300m length

## Connectivity

USB	USB version 2.0 (full speed) Type B		USB Version 2.0 (High Speed)			
USB host capability	●	●	●	●	●	●
Serial	Serial RS232C (DB9 female)		Serial RS232C (DB9 female)			
Wired LAN	10/100BASE-TX					
USB host port	●	●	●	●	●	●
Bluetooth	—		Version 5.0			
Bluetooth profile	—		SPP, Bluetooth Classic, GATT			
Wireless LAN	—		802.11a/b/g/n			
Wireless LAN security	—		Authentic method (encryption scheme) Infrastructure mode - Open system (None/ WEP64/WEP128) Common key authentication (WEP) WPA/WPA2 - PSK (TKIP+AES) EAP-FAST (TKIP/AES), PEAP (TKIP/AES), EAP-TLS (TKIP/AES), EAP-TTLS (TKIP/AES)			
MFI support	—		—			
AirPrint	—		—			
Wired LAN	●	●	●	●	●	●

\* Not suitable for RFID media

# TD-4T Range

TD-4420TN

TD-4520TN

TD-4650TNWB

TD-4750TNWB

TD-4650TNWBR

TD-4750TNWBR

4 inch

## General

Control panel	1 button 1 LED with 3 colours	1 LED with 3 colors, 6 buttons for Navigation, MENU and FEED/PAUSE/SELECT
LCD type	—	Colour

## Power

Adaptor	AC adaptor Input: AC 100-240V, 2.0A, 50-60Hz Output: DC24V, 2.5A, 60W, LPS	AC adaptor Input: AC 100-240V, 2.0A, 50-60Hz Output: DC 24V, 3.75A, 90W CEC6 compliance
---------	---	--

## Software

Operating system support	Windows 7/8/8.1/10/11, Windows Server 2008/2008R2/2012/2012R2/2016/2019, Linux, Mac OS v10.6-11
Supported printer commands	FBPL-EZD (EPL2, ZPL2, DPL) emulation
Barcode symbologies	Linear: Code128UCC, Code128 subsets A, B, C, EAN128, Interleaved 2 of 5, Interleaved 2 of 5 with check digit, Code39, Code39 with check digit, Code93, EAN13, EAN8, UPCA, UPCE, EAN and UPC 2 (5) digits add-on, Codabar, Postnet, MSI, MSI with check digit, PLESSEY, China post, ITF14, Code11, TELEPEN, TELEPENN, PLANET, Code49, Deutsche Post Identcode, Deutsche Post Leitcode, LOGMARS 2-dimensional: GS1 DataBar, GS1 DataMatrix, Maxicode, AZTEC, PDF417, QR Code, Micro PDF 417
Internal fonts	8 alpha-numeric bitmap fonts for FBPL Monotype Image® true type font engine with one CG Triumvirate Bold Condensed scalable font

## Memory

RAM	64MB	128MB
Flash	128MB	

## Environmental

Operating temperature	Operate: 5°C to 40°C
Operating humidity	25 - 85% non-condensing
Storage temperature	-40°C to 60°C
Storage humidity	10 - 90% (No condensation)

## Weights and dimensions

Dimensions (mm)	204(w) x 178(d) x 280(h)	219(w) x 284(d) x 191(h)
Weights	2.5kg	3.0kg

## Included items

Supplied in box	AC adaptor and cord, USB cable, Documentation, Pair of 1" Ribbon spindles for 300M ribbon, 1" Ribbon paper core	AC adaptor and cord, Pair of 1" ribbon spindles for 300m ribbon, 1" Ribbon paper core, USB Cable (1.5m), Quick start guide, Product safety guide (including warranty card)
-----------------	---	--

# Desktop printing supplies

## TD-4T Additional options

### PA-RH-001

#### External roll holder

TD-4420TN  
TD-4520TN  
TD-4650TNWB  
TD-4750TNWB  
TD-4650TNWBR  
TD-4750TNWBR



### PA-CU-003

#### Cutter

TD-4420TN  
TD-4520TN  
TD-4650TNWB  
TD-4750TNWB  
TD-4650TNWBR\*  
TD-4750TNWBR\*



### PA-LP-004

#### Peeler

TD-4420TN  
TD-4520TN  
TD-4650TNWB  
TD-4750TNWB  
TD-4650TNWBR\*  
TD-4750TNWBR\*



\* Not recommended for use with RFID tags

Supply type	Part code	Description	Size	Quantity	Rolls/box
Labels	BUS-1J074102-121	Uncoated thermal transfer die cut labels	102mm x 74mm	1,100 labels	6
	BUS-1J150102-121	Uncoated thermal transfer die cut labels	102mm x 150mm	550 labels	6
	BCS-1J074102-121	Coated thermal transfer die cut labels	102mm x 74mm	1,100 labels	6
	BCS-1J150102-121	Coated thermal transfer die cut labels	102mm x 150mm	550 labels	6
Ribbons	BWS-1D300-060	Standard wax ribbon	60mm x 300m	n/a	12
	BWS-1D300-080	Standard wax ribbon	80mm x 300m	n/a	12
	BWS-1D300-110	Standard wax ribbon	110mm x 300m	n/a	12
	BWP-1D300-060	Premium wax ribbon	60mm x 300m	n/a	12
	BWP-1D300-080	Premium wax ribbon	80mm x 300m	n/a	12
	BWP-1D300-110	Premium wax ribbon	110mm x 300m	n/a	12
	BSS-1D300-060	Standard wax/resin ribbon	60mm x 300m	n/a	12
	BSS-1D300-080	Standard wax/resin ribbon	80mm x 300m	n/a	12
	BSS-1D300-110	Standard wax/resin ribbon	110mm x 300m	n/a	12
	BSP-1D300-060	Premium wax/resin ribbon	60mm x 300m	n/a	12
	BSP-1D300-080	Premium wax/resin ribbon	80mm x 300m	n/a	12
	BSP-1D300-110	Premium wax/resin ribbon	110mm x 300m	n/a	12
	BRS-1D300-060	Standard resin ribbon	60mm x 300m	n/a	12
	BRS-1D300-080	Standard resin ribbon	80mm x 300m	n/a	12
	BRS-1D300-110	Standard resin ribbon	110mm x 300m	n/a	12
	BRP-1D300-060	Premium resin ribbon	60mm x 300m	n/a	12
BRP-1D300-080	Premium resin ribbon	80mm x 300m	n/a	12	
BRP-1D300-110	Premium resin ribbon	110mm x 300m	n/a	12	

For additional consumable options please contact your local Brother office.

With label design apps for desktop PCs and mobile devices, and Software Development Kits (SDKs) to integrate the TD range into your own applications, you can choose the best option for your label printing needs. Brother provides all the necessary tools required for software developers to integrate printing into their applications. Printer drivers are available for Windows OS, and SDKs can be provided to support Windows Mobile,\* Android and iOS operating systems.

## Software, support and features

### P-touch editor

Supplied as standard, you can create your own custom labels with pixel precision by using this powerful software solution. With features such as support for over 15 barcode protocols, advanced image dithering to print high quality grayscale images, and the ability to link to data contained in Excel spreadsheets for batch printing of labels, any label design is possible.

### Crop function

Built into the Windows driver, this function helps take away the inconvenience of using A4 sheets of labels in your standard printer. This clever feature automatically scans through the document and where a barcode is present it extracts shipping or product labels one at a time then prints as individual labels on the Brother label printer.

### Template mode

Design the required document on your Windows PC, including logos and barcodes. Once transferred and stored in the printer's memory, the template can be recalled and any data replaced, before printing with just a few short commands.

### Printer commands

With support for ZPL II emulation and a variety of additional printer command languages, developers can easily integrate printing into existing legacy systems (see specification tables for further details).

### Mobile deploy

Cloud-based app for mobile devices (iOS and Android™), which allows IT administrators to remotely update and configure multiple Brother mobile printers. Using Mobile Deploy, the administrator can easily upload new update packages to an online location, and then share the URLs with the users.

### Software development kits (SDKs)

Brother can also supply a selection of free of charge Software Development Kits to give you an easy method of incorporating label printing directly from within your own software programs. Available from: [www.brother.eu/developer](http://www.brother.eu/developer)

### Legacy print data conversion

This feature simplifies integration with legacy systems by converting print commands into P-touch templates. These templates can be updated externally to the legacy system without the need of specialist knowledge of print languages such as EPL, ESC/POS and others.

\* Compatibility may vary dependent on model - check table on following page



## Software

Model No	TD-2020A	TD-2120N	TD-2130N	TD-2125N	TD-2135N	TD-2125NWB	TD-2135NWB	TD-4210D	TD-4410D	TD-4420DN	TD-4520DN	TD-4550DNWB	TD-4420DNFC	TD-4550DNWBFC	TD-4420TN	TD-4520TN	TD-4650TNWB	TD-4750TNWB	TD-4650TNWBR	TD-4750TNWBR
P-touch Editor	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓						
Mobile Deploy App												✓	✓							
Brother Font Manager*								✓	✓	✓	✓	✓	✓	✓						
Printer Settings Tool	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓						
Bartender Ultra Lite Edition															✓	✓	✓	✓	✓	✓
Brother Printer Management Tool															✓	✓	✓	✓	✓	✓
Crop Function (Windows driver)											✓	✓		✓						

\* Font licensee permissions are required

For further details visit: <https://support.brother.com>

# brother

at your side

Contact:

[www.brother.co.uk](http://www.brother.co.uk)

**Brother UK Ltd.**

Shepley Street, Audenshaw  
Manchester, M34 5JD  
Tel: +44 (0) 333 777 4444

All specifications correct at the time of printing (May 2024) and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.